
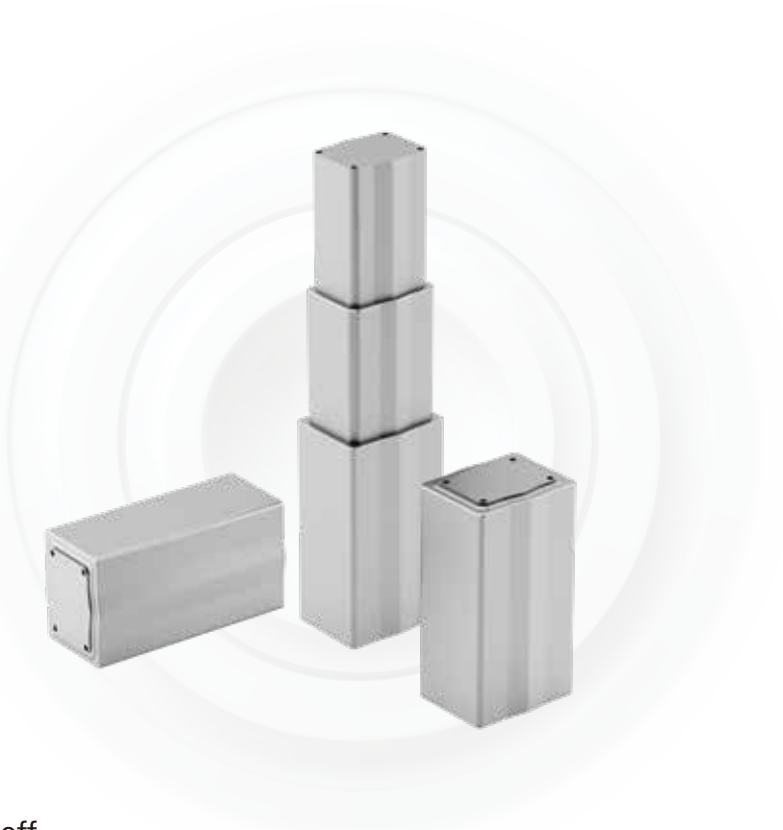


DC 20

LIFTING COLUMN



Standard configurations:

Duty cycle	Max 1min on / 8min off
Installation size	350+400mm or 320+380mm
Max load	2000N
Certification standard	IEC60601-1
Noise without loading	≤50dB(A)@500mm
Installation mode	Upright mounting
Feedback	Hall sensor
Anti-twist device	1000N

Drawings:

